




Inverter

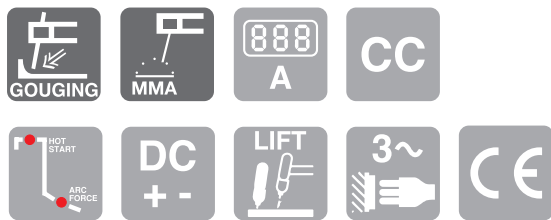

- Maximum efficiency (%100 630 A)
- Cutting and gouging with carbon electrode. (6 - 8 mm)
- Able to operate with generators
- Adjusting the sensitivity of current with digital display.
- Protection against overheating, overcurrent, overvoltage and short circuit
- Capable of working with up to 100 mt welding cable.
- Easy arc start and adjustable
- Arc start time
- Can be used for gouging carbon steel, low alloy steel, stainless steel, high alloy steel, copper, silver, molybdenum, titanium, etc.

TIG Mode

- Lift-TIG available

Extra Functions

- Hot Start
- Arc Force
- Gouging

Usage Areas

- Shipyards
- Off-Shores
- Industrial Facilities
- Automotive Industry
- Pipe Lines
- Aviation Industry
- Maintenance and Repair Applications

Input Voltage	V	3 Phase, 50/60 Hz, 380 V ±%10
Installed Power	kW	34,2
Fuse (delayed action)	A	52
No Load Voltage	V	96
Current Range	A	50-630
Duty Cycle at (40°C)	%100	630A
Standards		EN IEC 60974-1 / EN IEC 60974-10
Protection Class	IP	21S
Insulation Class		H
Dimensions (L*W*H)	mm	686 / 322 / 584
Weight	kg	58

STANDARD & OPTIONAL EQUIPMENTS

<p>This order code covers the welding machine and all of the equipments</p> <p>3021000097</p>	 <p>1021000062</p>	 <p>2020900662</p>	 <p>2020900661</p>	 <p>6051900088 (Optional)</p>	 <p>6051900107 (Optional)</p>
--	--	--	--	---	---