



- It is a multi-process (MIG-MAG/ MMA/LIFT/TIG) welding machine that can operate in a single phase.
- Ideal seams for steel, stainless and aluminium welding
- Compact design suitable for 5-15 kg wire use
- Great weld superiority in thin section materials
- Capability to weld without burrs with synergetic, pulse, double pulse feature
- Able to operate with generators
- Fully functional, user-friendly control panel layout for easy setup of welding parameters.
- Portable, lightweight and durable design for construction site conditions


Extra Functions

- Thermal Protection
- Overcurrent Protection
- Overvoltage Protection
- Plastic front and rear panels
- Durable metal body

Usage Areas

- Automotive
- Bodywork, sculpture
- Signage and advertising
- Industrial facilities
- Maintenance and repair applications
- Hobby applications etc...

Inverter

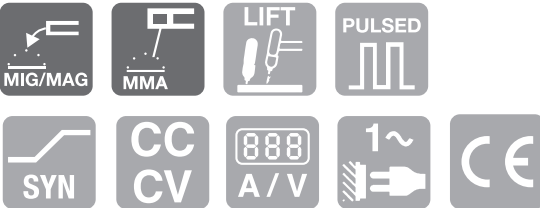

Input Voltage	V	1 Faz, 50/60 Hz, 230 V ±%10
Installed Power	kW	9,7
Delayed Fuse	A	42
No Load Voltage	V	63
Welding Current Range	A	10-210
Duty Cycle at (40°C)	%100 %60 %35	125 / 160 / 210
Standards		EN 60974-1 / EN 60974-10
Protection Class	IP	21 S
Insulation Class		H
Dimensions (L*W*H)	mm	410 x 210 x 440
Weight	kg	16

STANDARD & OPTIONAL EQUIPMENTS

<p>This Order Code Covers The Welding Machine and All of The Equipments</p>						
	1021000133	1021000109	1051900010	2020900723	1051300003	6051900088 (Opsiyonel)